

# Monthly Noise Monitoring Assessment

Tomingley Gold Mine, August 2017

Prepared for : Tomingley Gold Operations Pty Limited  
August 2017



# Document Information

## Monthly Noise Monitoring Assessment

### Tomingley Gold Mine, August 2017

Prepared for: Tomingley Gold Operations Pty Limited

**Prepared by:** Muller Acoustic Consulting Pty Ltd

PO Box 262, Newcastle NSW 2300

ABN: 36 602 225 132

P: +61 2 4920 1833

[www.mulleracoustic.com](http://www.mulleracoustic.com)

Document ID	Status	Date	Prepared	Signed
MAC160270RP14	Final	28 August 2017	Oliver Muller (MAAS)	

#### DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.

**CONTENTS**

1 INTRODUCTION .....5

2 ENVIRONMENTAL PROTECTION LICENSE NOISE LIMITS.....7

3 METHODOLOGY .....9

    3.1 LOCALITY .....9

    3.2 ASSESSMENT METHODOLOGY .....9

4 RESULTS ..... 11

    4.1 ASSESSMENT RESULTS - LOCATION R2..... 11

    4.2 ASSESSMENT RESULTS - LOCATION R3/R29 ..... 12

    4.3 ASSESSMENT RESULTS - LOCATION R4..... 13

    4.4 ASSESSMENT RESULTS - LOCATION R5..... 14

    4.5 ASSESSMENT RESULTS - LOCATION R6..... 15

    4.6 ASSESSMENT RESULTS - LOCATION R23..... 16

5 DISCUSSION ..... 17

    5.1 DISCUSSION OF RESULTS - LOCATION R2 ..... 17

    5.2 DISCUSSION OF RESULTS - LOCATION R3/R29..... 17

    5.3 DISCUSSION OF RESULTS - LOCATION R4 ..... 17

    5.4 DISCUSSION OF RESULTS - LOCATION R5 ..... 17

    5.5 DISCUSSION OF RESULTS - LOCATION R6 ..... 17

    5.6 DISCUSSION OF RESULTS - LOCATION R23 ..... 18

6 COMPARISON OF ATTENDED AND UNATTENDED MONITORING RESULTS ..... 19

7 CONCLUSION ..... 21

APPENDIX A - GLOSSARY OF TERMS

*This page has been intentionally left blank*

# 1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Tomingley Gold Operations Pty Ltd (TGO) to complete a Noise Monitoring Assessment (NMA) for Tomingley Gold Mine ('the mine').

The NMA involved quantifying the noise contribution of the mine by direct attended measurements to determine mining noise emissions so that effective management and controls can be implemented where required. The monitoring has been conducted in accordance with the TGO Noise Management Plan and in general accordance with Conditions L4.2 to L4.7 of the EPL at seven representative receiver locations. It is noted that this assessment has not been completed as part of the annual noise monitoring program to address conditions of the Environmental Protection License (EPL).

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Industrial Noise Policy (INP), 2000;
- Environment Protection Licence EPL 20169 (EPL); and
- Standards Australia AS 1055.1:1997 - Acoustics - Description and measurement of environmental noise - General Procedures.

A glossary of terms, definitions and abbreviations used in this report is provided in **Appendix A**.

*This page has been intentionally left blank*

## 2 Environmental Protection License Noise Limits

Historic assessments for the mine categorise receivers into Noise Assessment Groups (NAGs). The NAGs were derived based on ambient noise data that controlled receiver RBLs.

**Table 1** reproduces the operational and sleep disturbance noise limits for assessed receivers referenced from the EPL that have been adopted for this NMA and are consistent with historic EPL monitoring locations.

Table 1 Noise Limits, dBA					
Noise Assessment Group	Receivers	Day	Evening	Night	
		LAeq(15-min)	LAeq(15-min)	LAeq(15-min)	LA1(1-min)
NAG A	R6, R4	36	36	36	45
	R5	37	37	37	45
NAG B	R2	36	36	36	45
NAG C	R3	49	40	40	45
	R29	48	40	40	45
NAG D	R23	43	39	39	46

Note: Refer to figure in Appendix 4 of Project Approval 09-0155 for noise locations. However, these criteria do not apply if the Proponent has an agreement with the relevant owner(s) of these residences / land to generate higher noise levels, and the Proponent has advised the Department of Planning and Infrastructure and EPA in writing of the terms of this agreement.

*This page has been intentionally left blank*



### 3 Methodology

#### 3.1 Locality

TGO is located to the south of the village of Tomingley, NSW. Receivers in the locality surrounding the mine are primarily rural/residential and for consistency the naming conventions for each receiver has been retained from historic noise assessments. The monitoring locations with respect to the mine are presented in the locality plan shown in **Figure 1**.

#### 3.2 Assessment Methodology

The attended noise survey was conducted in general accordance with the procedures described in Australian Standard AS 1055-1997, "Acoustics - Description and Measurement of Environmental Noise" and the EPL. The measurements were carried out using Svantek Type 1, 971 noise analyser from Tuesday 1 August 2017 to Friday 4 August 2017. The acoustic instrumentation used carries current NATA calibration and complies with AS IEC 61672.1-2004-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed  $\pm 0.5$  dBA.

Both evening and night measurements were of 15 minutes in duration. Where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis as to calculate the LAeq(15-min) mine noise contribution for comparison against the relevant EPL limit.

Prevailing meteorological conditions for the monitoring period were sourced from TGO's meteorological station and analysed in accordance with Appendix E4 of the INP to determine the stability category present at the time of each measured sample. This was undertaken to determine applicability of results in accordance with Condition L4.3 of the EPL. Results obtained during non-prevailing meteorological conditions (ie F Class Stability in conjunction with a 2m/s drainage wind or a G Class Stability) are considered not applicable against the EPL criteria. It is noted that several measurements were unable to be surveyed due to rain and wind.

KEY



MINE SITE BOUNDARY



ASSESSED RECEPTORS



BROOKLANDS UNATTENDED

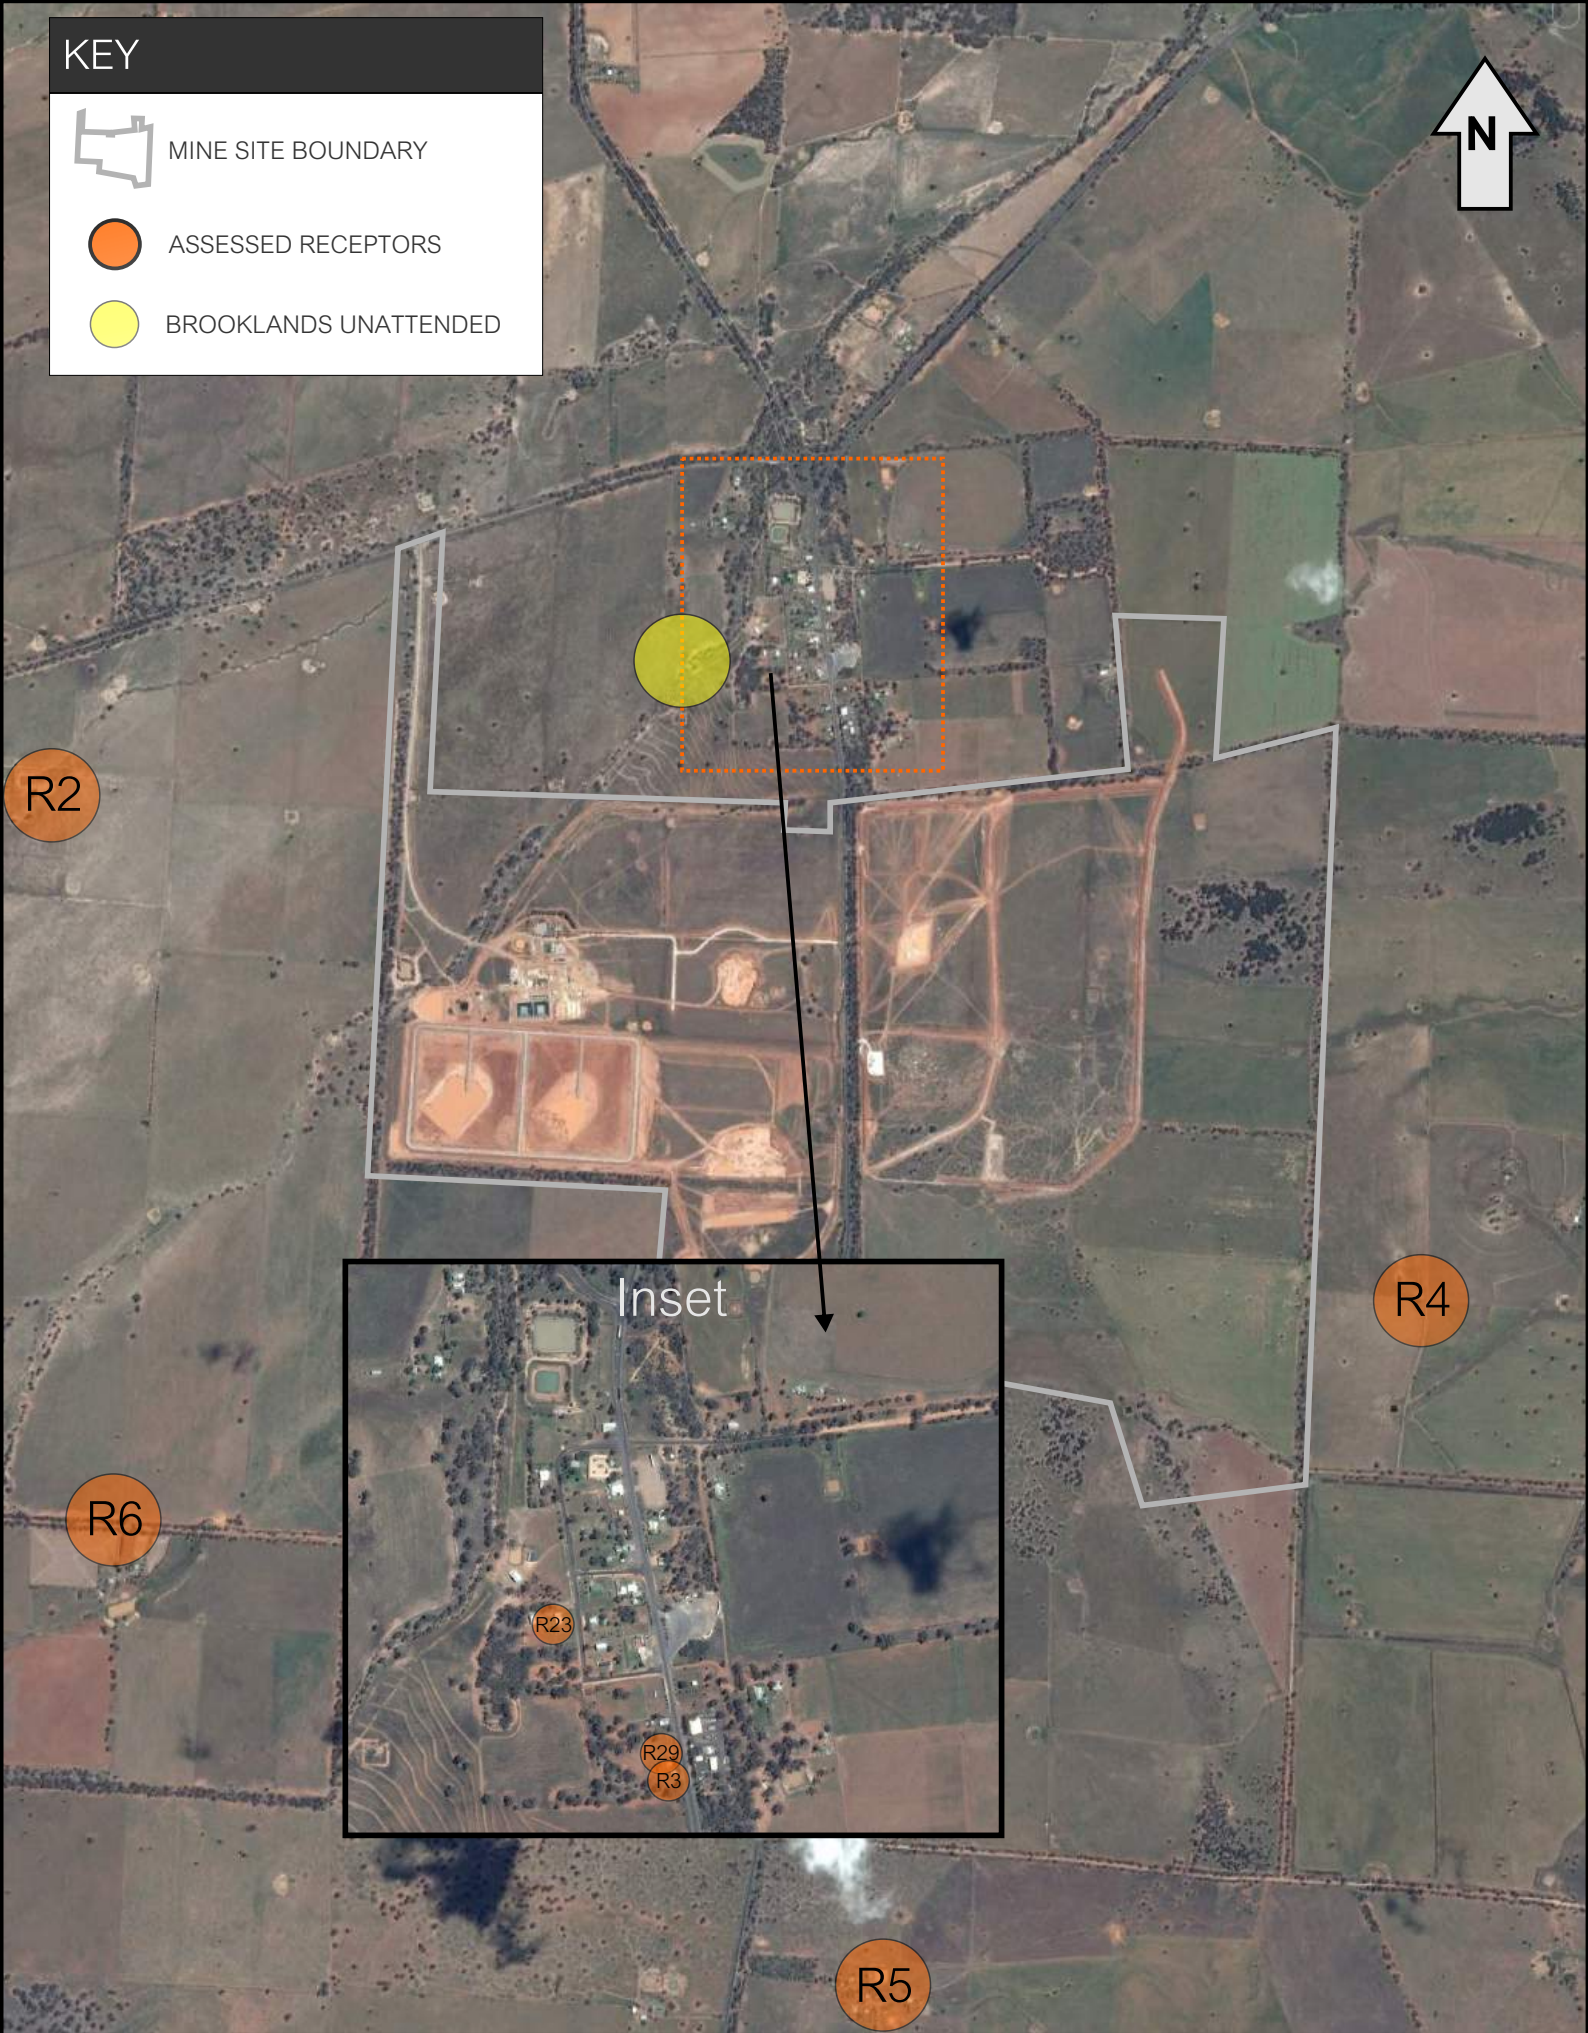


FIGURE 1 - LOCALITY PLAN AND ASSESSMENT LOCATIONS

TOMINGLEY GOLD MINE

REF: MAC160270

## 4 Results

The monitoring and assessment results are presented in individual tables for each assessment location.

### 4.1 Assessment Results - Location R2

The results of the attended noise measurements at location R2 for Tuesday 1 August 2017 to Thursday 3 August 2017 are summarised in **Table 2** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
01/08/17	21:43	71	41	33	36	Dir: N 0.2 m/s Stab Class: D	Livestock 33-41
							Mine hum 33-35 Highway traffic 33-37 Birds 33-35
TGO Site LAeq(15-min) Contribution							34
01/08/17	22:00	68	37	29	36	Dir: N 0.2 m/s Stab Class: E	Mine hum 31-33
							Livestock 34-38 Highway traffic <33
TGO Site LAeq(15-min) Contribution							32
02/08/17	21:38	61	39	36	36	Dir: NE 1.5 m/s Stab Class: E	Mine hum 32-36
							Highway traffic <32 Wind in trees 32-38
TGO Site LAeq(15-min) Contribution							34
02/08/17	22:00	55	40	36	36	Dir: NE 1 m/s Stab Class: D	Wind in trees 32-40
							Mine hum 32-36 Birds 32-41 Livestock <36
TGO Site LAeq(15-min) Contribution							34
03/08/17	21:44	64	34	26	36	Dir: N 1.5 m/s Stab Class: D	Wind in trees 24-30
							TGO Inaudible
TGO Site LAeq(15-min) Contribution							TGO Inaudible
03/08/17	22:00	63	35	27	36	Dir: N 1.5 m/s Stab Class: D	Wind in trees 24-32
							TGO Inaudible
TGO Site LAeq(15-min) Contribution							TGO Inaudible

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

## 4.2 Assessment Results - Location R3/R29

The results of the attended noise measurements at location R3/R29 for Tuesday 1 August 2017 to Thursday 3 August 2017 are summarised in **Table 3** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution. It is noted that both locations R3 and R29 are within 10m of each other and therefore have been assessed simultaneously.

**Table 3 Operator-Attended Noise Survey Results – Location R3/R29**

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
01/08/17	20:43	86	66	45	40	Dir: N 0.2 m/s Stab Class: E	Highway traffic 45-82 Idle trucks 46-50
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
01/08/17	22:59	88	64	43	40	Dir: N 0.1 m/s Stab Class: D	Highway traffic 45-82 Mine hum <40
TGO Site L <sub>Aeq</sub> (15-min) Contribution							<40
02/08/17	20:44	83	63	39	40	Dir: N 0.5 m/s Stab Class: E	Highway traffic 38-82 Idle trucks <38
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
02/08/17	22:58	85	60	39	40	Dir: N 1 m/s Stab Class: E	Highway traffic 38-84 Idle trucks 38-42 Mine hum <34
TGO Site L <sub>Aeq</sub> (15-min) Contribution							<34
03/08/17	20:45	84	66	30	40	Dir: N 1 m/s Stab Class: D	Highway traffic 34-83 Wind in trees 28-36
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
Night measurements on 03/08/17 at R3/R29 were unable to be obtained due to unsuitable meteorological conditions as per AS1055							

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.



#### 4.3 Assessment Results - Location R4

The results of the attended noise measurements at location R4 for Tuesday 1 August 2017 to Friday 4 August 2017 are summarised in **Table 4** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution. It is noted that access was limited at this survey location therefore measurements were conducted at the boundary as shown in **Figure 1**.

**Table 4 Operator-Attended Noise Survey Results – Location R4**

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
01/08/17	19:59	59	35	22	36	Dir: N 0.1 m/s Stab Class: E	Livestock 25-41 Highway traffic 26-38
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
01/08/17	23:44	67	38	19	36	Dir: N 0.1 m/s Stab Class: E	Livestock 26-38 Highway traffic <32
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
02/08/17	20:00	57	29	18	36	Dir: N 0.1 m/s Stab Class: F	Livestock 29-34 Highway traffic 25-30
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
02/08/17	23:42	65	39	32	36	Dir: N 3 m/s Stab Class: E	Wind in trees 38-46 Livestock <30 Highway traffic 36-42
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
03/08/17	19:58	68	42	37	36	Dir: N 0.2 m/s Stab Class: E	Highway traffic 32-38 Mine hum <35
TGO Site L <sub>Aeq</sub> (15-min) Contribution							<35
04/08/17	00:05	67	39	32	36	Dir: N 1.5 m/s Stab Class: D	Highway traffic 32-35 Mine hum <32 Livestock <34
TGO Site L <sub>Aeq</sub> (15-min) Contribution							<32

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

#### 4.4 Assessment Results - Location R5

The results of the attended noise measurements at location R5 for Tuesday 1 August 2017 to Friday 4 August 2017 are summarised in **Table 5** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Table 5 Operator-Attended Noise Survey Results – Location R5							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
01/08/17	19:39	84	66	28	37	Dir: N	Highway traffic 38-81
						0.1 m/s	Livestock 23-34
							Dog bark 23-27
							Local residential noise 48-76
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
02/08/17	00:03	85	64	23	37	Dir: N	Highway traffic 36-81
						0.2 m/s	Livestock <32
							Stab Class: D
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
02/08/17	19:40	84	65	33	37	Dir: N	Highway traffic 29-80
						0.1 m/s	
							Stab Class: G
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
03/08/17	00:01	84	61	45	37	Dir: NE	Highway traffic 42-81
						4 m/s	Wind in trees 42-44
							Stab Class: D
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
03/08/17	19:36	89	67	35	37	Dir: N	Highway traffic 34-87
						0.1 m/s	Livestock <34
							Stab Class: E
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
04/08/17	00:27	86	63	33	37	Dir: N	Highway traffic 38-84
						1.5 m/s	Wind in trees 34-38
							Stab Class: E
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

#### 4.5 Assessment Results - Location R6

The results of the attended noise measurements at location R6 for Tuesday 1 August 2017 to Thursday 3 August 2017 are summarised in **Table 6** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Table 6 Operator-Attended Noise Survey Results – Location R6							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
01/08/17	20:22	57	30	23	36	Dir: N 0.1 m/s Stab Class: E	Highway traffic 28-29
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
01/08/17	23:20	66	40	31	36	Dir: N 0.2 m/s Stab Class: E	Highway traffic 34-40 Mine hum 30-34
TGO Site L <sub>Aeq</sub> (15-min) Contribution							32
02/08/17	20:23	68	42	38	36	Dir: N 0.5 m/s Stab Class: E	Highway traffic 36-44 Mine hum 35-38 Livestock <35 Wind in trees <35
TGO Site L <sub>Aeq</sub> (15-min) Contribution							36
02/08/17	23:20	70	47	44	36	Dir: N 1.5 m/s Stab Class: E	Mine hum <36 Wind in trees 38-46 Highway traffic 36-44
TGO Site L <sub>Aeq</sub> (15-min) Contribution							<36
03/08/17	20:22	71	41	33	36	Dir: N 0.5 m/s Stab Class: E	Mine hum 35-37 Highway traffic 37-44 Birds 35-51 Livestock <35
TGO Site L <sub>Aeq</sub> (15-min) Contribution							32
03/08/17	23:40	69	40	33	36	Dir: N 1.5 m/s Stab Class: D	Wind in trees 32-36 Highway traffic <32 Mine hum <32
TGO Site L <sub>Aeq</sub> (15-min) Contribution							<32

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

#### 4.6 Assessment Results - Location R23

The results of the attended noise measurements at location R23 for Tuesday 1 August 2017 to Thursday 3 August 2017 are summarised in **Table 7** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Table 7 Operator-Attended Noise Survey Results – Location R23							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
01/08/17	21:00	57	46	41	39	Dir: N	Highway traffic 36-54
						0.5 m/s	Mine hum 32-38
						Stab Class: E	Wind in trees <36
TGO Site L <sub>Aeq</sub> (15-min) Contribution							35
01/08/17	22:41	61	47	41	39	Dir: N	Highway traffic 44-53
						0.2 m/s	Mine hum 36-44
						Stab Class: E	
TGO Site L <sub>Aeq</sub> (15-min) Contribution							36
02/08/17	20:58	56	41	37	39	Dir: N	Highway traffic 34-38
						0.2 m/s	Mine hum <34
						Stab Class: F	
TGO Site L <sub>Aeq</sub> (15-min) Contribution							<34
02/08/17	22:41	54	42	37	39	Dir: N	Wind in trees <41
						1.5 m/s	Highway traffic 41-49
						Stab Class: D	Idle trucks 38-41
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
03/08/17	21:03	62	40	30	39	Dir: N	Highway traffic <43
						1 m/s	Wind in trees <43
						Stab Class: D	Idle trucks 43-48
TGO Site L <sub>Aeq</sub> (15-min) Contribution							Local residential noise <43
TGO Site L <sub>Aeq</sub> (15-min) Contribution							TGO Inaudible
Night measurements on 03/08/17 at R23 were unable to be obtained due to unsuitable meteorological conditions as per AS1055							

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.



## 5 Discussion

### 5.1 Discussion of Results - Location R2

Monitoring between Tuesday 1 August 2017 to Thursday 3 August 2017 identified that TGO noise was audible on four of six occasions. Noise contribution from TGO when audible was measured at between 32dBA and 34dBA, and satisfied the relevant noise limits of 36dBA. Extraneous sources such as highway traffic, wind in trees, birds and livestock were also audible during the survey.

### 5.2 Discussion of Results - Location R3/R29

Monitoring results for R3/R29 were dominated by highway traffic that was constant during August 2017 measurements. TGO emissions were audible on two of six occasions, with the contribution ranging between <34dBA and <40dBA, therefore satisfying the relevant noise limit of 40dBA. Highway traffic, wind in trees, idling trucks and mine hum were the dominant sources. It is noted that measurements were unable to be obtained during the night period on the 03/08/17 due to intermittent rain events.

### 5.3 Discussion of Results - Location R4

Mine noise was audible on two of six occasions during the August 2017 survey period. The relevant noise limit of 36dBA not exceeded during the August 2017 period and therefore satisfies relevant criteria. Mine contributions ranged between <32dBA and <35dBA and satisfied the EPL criteria of 36dBA. Non-mining noise sources included highway traffic, livestock and wind in trees.

### 5.4 Discussion of Results - Location R5

Mining noise emissions were inaudible during all six attended noise monitoring surveys at this location for the August 2017 assessment. The relevant noise limits of 37dBA were satisfied as TGO emissions remained inaudible. Highway traffic was the dominant source at this receiver with the only other non-mining sources including livestock, dog bark, local residential noise and wind in trees.

### 5.5 Discussion of Results - Location R6

TGO mine hum was audible on five of six occasions throughout the August 2017 monitoring period at R6. Measurements ranged from 32dBA to 36dBA and therefore satisfied the relevant EPL noise limit of 36dBA LAeq(15-min). Although contributions were measured at the relevant criteria of 36dBA, it is not considered as an exceedance. Non-mining sources included livestock, highway traffic, birds and wind in trees.

## 5.6 Discussion of Results - Location R23

Mining noise was audible on the of five occasions at this location. TGO emissions ranged between <34dBA and 36dBA, and remained in compliance with the relevant EPL criteria of 39dBA. Non-mining sources included highway traffic, wind in trees, local residential noise and idling trucks. It is noted that measurements were unable to be obtained during the night period on the 03/08/17 due to unsuitable weather conditions including intermittent rainfall.

## 6 Comparison of Attended and Unattended Monitoring Results

To address Condition 6 of Schedule 3 of the Project Approval, a program to calibrate and validate the real-time noise monitoring results with the attended monitoring results has been completed.

The validation compares monthly attended monitoring results against the closest assessed unattended monitoring location. Currently, TGO has one unattended real-time monitoring terminal installed at the Brooklands property (nearest to R23). The **Figure 1** locality plan identifies the location of the monitor with respect to the attended monitoring locations. It is noted that the Brooklands unattended monitor is situated 600m west of the attended noise monitoring location R23, therefore, background (LA90) noise levels are significantly lower due to offset distance to highway traffic.

A comparison of mine noise contributions between attended and unattended noise monitoring demonstrates a general consistency between attended and unattended results. It was noted that highway traffic noise influenced measured noise levels for this assessment. Furthermore, for August 2017, results remained below the relevant criteria for both attended and unattended locations.

**Table 8** provides a summary comparison of results between the attended and unattended noise surveys for R23.

**Table 8 Comparison of Attended and Unattended Results – R23**

Assessment Type	Time (hrs)	Descriptor (dBA re 20 µPa)			Criteria	Mine Noise Contribution	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>				
Tuesday 1 August 2017								
Attended	21:00	57	46	41	39	35	Dir: N 0.5 m/s Stab Class: E	Highway traffic 36-54 Mine hum 32-38 Wind in trees <36
Unattended	21:00	55	44	39	39	35	Stab Class: E	Highway traffic Mine hum
Attended	22:41	61	47	41	39	36	Dir: N 0.2 m/s	Highway traffic 44-53 Mine hum 36-44
Unattended	22:30	55	44	39	39	TGO Inaudible	Stab Class: E	Highway traffic Birds
Wednesday 2 August 2017								
Attended	20:58	56	41	37	39	<34	Dir: N 0.2 m/s	Highway traffic 34-38 Mine hum <34
Unattended	21:00	57	44	35	39	36	Stab Class: F	Highway traffic Mine hum
Attended	22:41	54	42	37	39	TGO Inaudible	Dir: N 1.5 m/s	Wind in trees <41 Highway traffic 41-49 Idle trucks 38-41
Unattended	22:30	60	45	36	39	TGO Inaudible	Stab Class: D	Highway traffic
Thursday 3 August 2017								
Attended	21:03	62	40	30	39	TGO Inaudible	Dir: N 1 m/s Stab Class: D	Highway traffic <43 Wind in trees <43 Idle trucks 43-48 Local residential noise <43
Unattended	21:00	50	38	28	39	TGO Inaudible	Stab Class: D	Highway traffic Wind
Night measurements on 03/08/17 at R23 were unable to be obtained due to unsuitable meteorological conditions as per AS1055.								

Note 1: Meteorological data obtained from TGO's on-site weather station.

## 7 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment on behalf of Tomingley Gold Operations (TGO). The assessment was completed to provide monthly monitoring data so that TGO can actively quantify and manage site noise emissions.

Attended monitoring conducted from 1 August 2017 to 4 August 2017, identified that TGO was audible on several occasions although did not exceeded relevant limits during the August 2017 assessment period.

*This page has been intentionally left blank*

# Appendix A - Glossary of Terms

Several technical terms have been used in this report and are explained in **Table A1**.

Table A1 Glossary of Terms	
Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the INP as a single figure background level for each assessment period (day, evening and night). It is the tenth percentile of the measured L90 statistical noise levels.
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the most common being the 'A-weighted' scale. This attempts to closely approximate the frequency response of the human ear.
dB(Z)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a source, and is the equivalent continuous sound pressure level over a given period.
LAmx	The maximum root mean squared (rms) sound pressure level received at the microphone during a measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing each assessment period over the whole monitoring period. The RBL is used to determine the intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (SWL)	This is a measure of the total power radiated by a source. The sound power of a source is a fundamental location of the source and is independent of the surrounding environment. Or a measure of the energy emitted from a source as sound and is given by : $= 10 \cdot \log_{10} (W/W_0)$ Where : W is the sound power in watts and W <sub>0</sub> is the sound reference power at 10-12 watts.

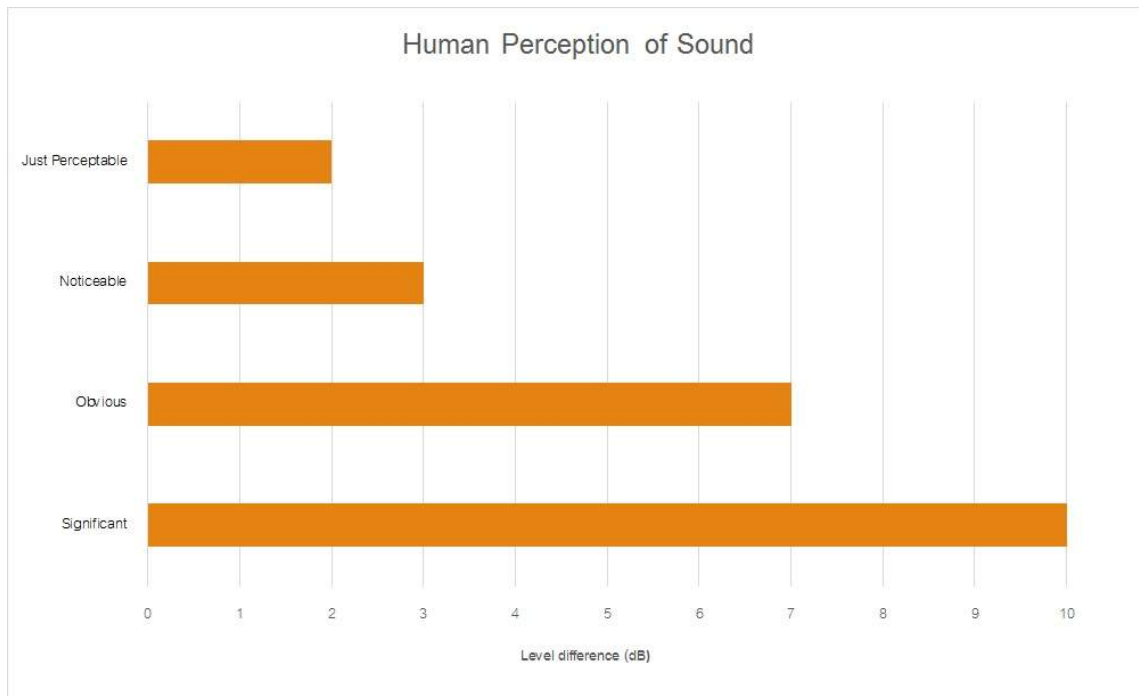


Table A2 provides a list of common noise sources and their typical sound level.

**Table A2 Common Noise Sources and Their Typical Sound Pressure Levels (SPL), dBA**

Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

Figure A1 – Human Perception of Sound



Muller Acoustic Consulting Pty Ltd  
PO Box 262, Newcastle NSW 2300  
ABN: 36 602 225 132  
P: +61 2 4920 1833  
[www.mulleracoustic.com](http://www.mulleracoustic.com)

