

Monthly Noise Monitoring Assessment

Tomingley Gold Mine, June 2017

Prepared for : Tomingley Gold Operations Pty Limited
June 2017



Document Information

Monthly Noise Monitoring Assessment

Tomingley Gold Mine, June 2017

Prepared for: Tomingley Gold Operations Pty Limited

Prepared by: Muller Acoustic Consulting Pty Ltd

PO Box 262, Newcastle NSW 2300

ABN: 36 602 225 132

P: +61 2 4920 1833

www.mulleracoustic.com

Document ID	Status	Date	Prepared	Signed
MAC160270RP12	Final	30 June 2017	Oliver Muller (MAAS)	

DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.

CONTENTS

1 INTRODUCTION5

2 ENVIRONMENTAL PROTECTION LICENSE NOISE LIMITS.....7

3 METHODOLOGY9

 3.1 LOCALITY9

 3.2 ASSESSMENT METHODOLOGY9

4 RESULTS 11

 4.1 ASSESSMENT RESULTS - LOCATION R2..... 11

 4.2 ASSESSMENT RESULTS - LOCATION R3/R29 12

 4.3 ASSESSMENT RESULTS - LOCATION R4..... 13

 4.4 ASSESSMENT RESULTS - LOCATION R5..... 14

 4.5 ASSESSMENT RESULTS - LOCATION R6..... 15

 4.6 ASSESSMENT RESULTS - LOCATION R23..... 16

5 DISCUSSION 17

 5.1 DISCUSSION OF RESULTS - LOCATION R2 17

 5.2 DISCUSSION OF RESULTS - LOCATION R3/R29..... 17

 5.3 DISCUSSION OF RESULTS - LOCATION R4 17

 5.4 DISCUSSION OF RESULTS - LOCATION R5 17

 5.5 DISCUSSION OF RESULTS - LOCATION R6 17

 5.6 DISCUSSION OF RESULTS - LOCATION R23 18

6 COMPARISON OF ATTENDED AND UNATTENDED MONITORING RESULTS 19

7 CONCLUSION 21

APPENDIX A - GLOSSARY OF TERMS

This page has been intentionally left blank

1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Tomingley Gold Operations Pty Ltd (TGO) to complete a Noise Monitoring Assessment (NMA) for Tomingley Gold Mine ('the mine').

The NMA involved quantifying the noise contribution of the mine by direct attended measurements to determine mining noise emissions so that effective management and controls can be implemented where required. The monitoring has been conducted in accordance with the TGO Noise Management Plan and in general accordance with Conditions L4.2 to L4.7 of the EPL at six representative receiver locations. It is noted that this assessment has not been completed as part of the annual noise monitoring program to address conditions of the Environmental Protection License (EPL).

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Industrial Noise Policy (INP), 2000;
- Environment Protection Licence EPL 20169 (EPL); and
- Standards Australia AS 1055.1:1997 - Acoustics - Description and measurement of environmental noise - General Procedures.

A glossary of terms, definitions and abbreviations used in this report is provided in **Appendix A**.

This page has been intentionally left blank

2 Environmental Protection License Noise Limits

Historic assessments for the mine categorise receivers into Noise Assessment Groups (NAGs). The NAGs were derived based on ambient noise data that controlled receiver RBLs.

Table 1 reproduces the operational and sleep disturbance noise limits for assessed receivers referenced from the EPL that have been adopted for this NMA and are consistent with historic EPL monitoring locations.

Table 1 Noise Limits, dBA					
Noise Assessment Group	Receivers	Day	Evening	Night	
		LAeq(15-min)	LAeq(15-min)	LAeq(15-min)	LA1(1-min)
NAG A	R1, R6	36	36	36	45
	R5	37	37	37	45
	R4	36	36	36	45
NAG B	R2	36	36	36	45
NAG C	R3	49	40	40	45
	R29	48	40	40	45
NAG D	R23	43	39	39	46

Note: Refer to figure in Appendix 4 of Project Approval 09-0155 for noise locations. However, these criteria do not apply if the Proponent has an agreement with the relevant owner(s) of these residences / land to generate higher noise levels, and the Proponent has advised the Department of Planning and Infrastructure and EPA in writing of the terms of this agreement.

This page has been intentionally left blank

3 Methodology

3.1 Locality

TGO is located to the south of the village of Tomingley, NSW. Receivers in the locality surrounding the mine are primarily rural/residential and for consistency the naming conventions for each receiver has been retained from historic noise assessments. The monitoring locations with respect to the mine are presented in the locality plan shown in **Figure 1**.

3.2 Assessment Methodology

The attended noise survey was conducted in general accordance with the procedures described in Australian Standard AS 1055-1997, "Acoustics - Description and Measurement of Environmental Noise" and the EPL. The measurements were carried out using Svantek Type 1, 971 noise analyser from Tuesday 6 June 2017 to Thursday 8 June 2017. The acoustic instrumentation used carries current NATA calibration and complies with AS IEC 61672.1-2004-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed ± 0.5 dBA.

Both evening and night measurements were of 15 minutes in duration. Where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis as to calculate the LAeq(15-min) mine noise contribution for comparison against the relevant EPL limit.

Prevailing meteorological conditions for the monitoring period were sourced from TGO's meteorological station and analysed in accordance with Appendix E4 of the INP to determine the stability category present at the time of each measured sample. This was undertaken to determine applicability of results in accordance with Condition L4.3 of the EPL. Results obtained during non-prevailing meteorological conditions (ie F Class Stability in conjunction with a 2m/s drainage wind or a G Class Stability) are considered not applicable against the EPL criteria.

KEY



MINE SITE BOUNDARY



ASSESSED RECEPTORS



BROOKLANDS UNATTENDED



FIGURE 1 - LOCALITY PLAN AND ASSESSMENT LOCATIONS

TOMINGLEY GOLD MINE EPL NOISE MONITORING

REF: MAC160270

4 Results

The monitoring and assessment results are presented in individual tables for each assessment location.

4.1 Assessment Results - Location R2

The results of the attended noise measurements at location R2 for Tuesday 6 June 2017 to Thursday 8 June 2017 are summarised in **Table 2** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Table 2 Operator-Attended Noise Survey Results – Location R2							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology ¹	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}			
06/06/17	21:45	63	36	27	36	Dir: S	Highway traffic 28-34
						0.1 m/s	Livestock 28-35
						Stab Class: E	Mine hum 28-30
TGO Site L _{Aeq} (15-min) Contribution							30
06/06/17	22:03	68	41	31	36	Dir: S	Livestock 28-35
						0.1 m/s	Highway traffic 28-34
						Stab Class: E	Mine hum 28-30
TGO Site L _{Aeq} (15-min) Contribution							30
07/06/17	21:42	56	43	41	36	Dir: S	Mine hum 31-35
						0.5 m/s	Livestock 35-39
						Stab Class: E	Highway traffic 35-44
TGO Site L _{Aeq} (15-min) Contribution							35
07/06/17	22:00	63	42	40	36	Dir: S	Mine hum 31-37
						0.3 m/s	Highway traffic 34-40
						Stab Class: D	
TGO Site L _{Aeq} (15-min) Contribution							34
08/06/17	21:08	61	38	34	36	Dir: S	Livestock 28-34
						2 m/s	Highway traffic 30-37
						Stab Class: E	Mine hum 28-36
TGO Site L _{Aeq} (15-min) Contribution							33
08/06/17	22:00	60	38	32	36	Dir: S	Local residential noise 34-60
						2 m/s	Mine hum 28-33
						Stab Class: E	Highway traffic 26-30
TGO Site L _{Aeq} (15-min) Contribution							31

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.2 Assessment Results - Location R3/R29

The results of the attended noise measurements at location R3/R29 for Tuesday 6 June 2017 to Thursday 8 June 2017 are summarised in **Table 3** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution. It is noted that both locations R3 and R29 are within 10m of each other and therefore have been assessed simultaneously.

Table 3 Operator-Attended Noise Survey Results – Location R3/R29

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology ¹	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}			
06/06/17	21:15	89	65	48	40	Dir: S 0.1 m/s Stab Class: E	Highway traffic 35-80 Mine hum 31-38
TGO Site L _{Aeq} (15-min) Contribution							35
06/06/17	22:50	83	66	45	40	Dir: S 0.1 m/s Stab Class: E	Highway traffic 40-81 Mine hum 32-40
TGO Site L _{Aeq} (15-min) Contribution							36
07/06/17	20:57	86	67	46	40	Dir: S 1 m/s Stab Class: E	Highway traffic 40-85 Mine hum 36-41
TGO Site L _{Aeq} (15-min) Contribution							38
07/06/17	22:40	92	69	46	40	Dir: S 4 m/s Stab Class: D	Highway traffic 38-89 Mine hum 34-40
TGO Site L _{Aeq} (15-min) Contribution							37
08/06/17	20:24	86	67	47	40	Dir: SE 1 m/s Stab Class: D	Highway traffic 38-86 Mine hum 36-40
TGO Site L _{Aeq} (15-min) Contribution							34
08/06/17	22:43	86	65	46	40	Dir: S 3 m/s Stab Class: D	Highway traffic 38-84 Reverse alarm <30 Idle truck 40-43
TGO Site L _{Aeq} (15-min) Contribution							<30

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.3 Assessment Results - Location R4

The results of the attended noise measurements at location R4 for Tuesday 6 June 2017 to Thursday 8 June 2017 are summarised in **Table 4** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Table 4 Operator-Attended Noise Survey Results – Location R4							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology ¹	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}			
06/06/17	20:24	49	39	37	36	Dir: S	Highway traffic 34-38
						0.1 m/s	Mine hum 32-34
						Stab Class: E	Dog 28-49
TGO Site L _{Aeq} (15-min) Contribution							33
06/06/17	23:37	51	33	28	36	Dir: S	Mine hum 32-34
						0.2 m/s	Highway traffic 32-34
						Stab Class: F	Dog 51
TGO Site L _{Aeq} (15-min) Contribution							33
07/06/17	20:08	73	46	25	36	Dir: S	Highway traffic 28-32
						3 m/s	Wind in trees 26-28
						Stab Class: D	Mine hum 24-28
TGO Site L _{Aeq} (15-min) Contribution							26
07/06/17	23:31	60	31	18	36	Dir: S	Local residential noise 33-75
						2 m/s	Aircraft 34-44
						Stab Class: D	Dog 27-60
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
08/06/17	19:35	47	29	24	36	Dir: S	Highway traffic 29-34
						0.5 m/s	Wind in trees <30
						Stab Class: D	
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
08/06/17	23:30	61	29	24	36	Dir: S	Wind in trees 23-35
						3 m/s	Highway traffic <30
						Stab Class: D	Dog to 61
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.4 Assessment Results - Location R5

The results of the attended noise measurements at location R5 for Tuesday 6 June 2017 to Thursday 8 June 2017 are summarised in **Table 5** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Table 5 Operator-Attended Noise Survey Results – Location R5							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology ¹	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}			
06/06/17	20:01	85	67	35	37	Dir: S	Highway traffic 34-83
						0.1 m/s	
						Stab Class: E	
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
07/06/17	00:02	86	59	14	37	Dir: S	Highway traffic to 84
						0.2 m/s	Wind in trees 18-23
						Stab Class: F	Dog 16-21
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
07/06/17	19:43	84	67	29	37	Dir: S	Highway traffic 26-78
						2 m/s	Wind in trees 18-24
						Stab Class: D	
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
07/06/17	23:53	84	61	21	37	Dir: S	Highway traffic 18-78
						3 m/s	Livestock 18-27
						Stab Class: E	Wind in trees 18-23
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
08/06/17	19:11	87	68	29	37	Dir: SE	Highway traffic 34-83
						3 m/s	Wind in trees 30-34
						Stab Class: D	
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
08/06/17	23:54	86	63	24	37	Dir: S	Wind in trees 32-82
						3 m/s	Highway traffic 32-82
						Stab Class: D	
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.5 Assessment Results - Location R6

The results of the attended noise measurements at location R6 for Tuesday 6 June 2017 to Thursday 8 June 2017 are summarised in **Table 6** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Table 6 Operator-Attended Noise Survey Results – Location R6							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology ¹	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}			
06/06/17	20:51	44	36	35	36	Dir: S 0.1 m/s Stab Class: E	Highway traffic 30-35 Livestock 18-24
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
06/06/17	23:12	59	32	20	36	Dir: S 0.2 m/s Stab Class: E	Mine hum 30-34 Highway traffic 30-36 Livestock 19-21
TGO Site L _{Aeq} (15-min) Contribution							32
07/06/17	20:34	51	38	34	36	Dir: S 6 m/s Stab Class: D	Highway traffic 32-36 Wind in trees 36-51 Mine hum 32-36
TGO Site L _{Aeq} (15-min) Contribution							34
07/06/17	23:02	57	35	22	36	Dir: S 3 m/s Stab Class: D	Highway traffic 28-48
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
08/06/17	20:02	48	24	16	36	Dir: SE 1 m/s Stab Class: D	Highway traffic 16-44
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible
08/06/17	23:04	62	34	29	36	Dir: S 2 m/s Stab Class: D	Highway traffic 28-38 Wind in trees 26-58
TGO Site L _{Aeq} (15-min) Contribution							TGO Inaudible

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.6 Assessment Results - Location R23

The results of the attended noise measurements at location R23 for Tuesday 6 June 2017 to Thursday 8 June 2017 are summarised in **Table 7** along with prevailing meteorological conditions at the time of each survey, relevant EPL limits and the mining noise contribution.

Table 7 Operator-Attended Noise Survey Results – Location R23							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology ¹	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}			
06/06/17	21:31	62	51	47	39	Dir: S 0.2 m/s Stab Class: E	Highway traffic 45-50 Mine hum 32-36
TGO Site L _{Aeq} (15-min) Contribution							38
06/06/17	22:32	58	46	43	39	Dir: S 0.2 m/s Stab Class: E	Highway traffic 34-51 Mine hum 28-34
TGO Site L _{Aeq} (15-min) Contribution							32
07/06/17	21:17	57	48	43	39	Dir: S 0.5 m/s Stab Class: D	Highway traffic 45-52 Mine hum 38-40
TGO Site L _{Aeq} (15-min) Contribution							39
07/06/17	22:24	58	50	47	39	Dir: S 4 m/s Stab Class: D	Highway traffic 45-60 Mine hum 35-42 Idle truck 50-52
TGO Site L _{Aeq} (15-min) Contribution							35
08/06/17	20:44	59	48	43	39	Dir: S 1 m/s Stab Class: E	Highway traffic 36-50 Mine hum 32-36 Wind in trees 34-40
TGO Site L _{Aeq} (15-min) Contribution							34
08/06/17	22:25	54	46	42	39	Dir: S 2 m/s Stab Class: D	Idle truck 40-41 Mine hum 32-42 Highway traffic 36-51 Birds 38-46 Wind in trees <23
TGO Site L _{Aeq} (15-min) Contribution							37

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

5 Discussion

5.1 Discussion of Results - Location R2

Monitoring between Tuesday 6 June 2017 to Thursday 8 June 2017 identified that TGO noise was audible on all six occasions. Noise contribution from TGO when audible was measured at between 30dBA and 35dBA, and satisfied the relevant noise limits of 36dBA. Extraneous sources such as highway traffic, local residential noise, livestock and a train were also audible during the survey.

5.2 Discussion of Results - Location R3/R29

Monitoring results for R3/R29 were dominated by highway traffic that was constant during June 2017 measurements. TGO emissions were audible on all six occasions, with the contribution ranging between 18dBA and 38dBA, therefore satisfying the relevant noise limit of 40dBA. Highway traffic and mine hum were the only two dominant sources.

5.3 Discussion of Results - Location R4

Mine noise was audible on three of six occasions during the June 2017 survey period with contributions ranging between 26dBA and 33dBA and satisfied the EPL criteria of 36dBA. Non-mining noise sources included dogs, highway traffic, aircrafts, local residential noise and wind in trees.

5.4 Discussion of Results - Location R5

Mining noise emissions were inaudible during all six attended noise monitoring surveys at this location for the June 2017 assessment. The relevant noise limits of 37dBA were satisfied as TGO emissions remained inaudible. Highway traffic was the dominant source at this receiver with other non-mining sources including wind in trees, a dog and livestock audible.

5.5 Discussion of Results - Location R6

TGO mine hum was audible on two of six occasions throughout the June 2017 monitoring period at R6. The $LA_{eq}(15\text{-min})$ mine noise contribution ranged between 32dBA and 34dBA and satisfied the relevant EPL noise limit of 36dBA $LA_{eq}(15\text{-min})$. Non-mining sources included livestock, highway traffic and wind in trees.

5.6 Discussion of Results - Location R23

Mining noise was audible on all six occasions at this location. TGO emissions ranged between 32dBA and 39dBA, and remained in compliance with the relevant EPL criteria of 39dBA. Non-mining sources included highway traffic, idling trucks, wind in trees and birds.

6 Comparison of Attended and Unattended Monitoring Results

To address Condition 6 of Schedule 3 of the Project Approval, a program to calibrate and validate the real-time noise monitoring results with the attended monitoring results has been completed.

The validation compares monthly attended monitoring results against the closest assessed unattended monitoring location. Currently, TGO has one unattended real-time monitoring terminal installed at the Brooklands property (nearest to R23). The **Figure 1** locality plan identifies the location of the monitor with respect to the attended monitoring locations. It is noted that the Brooklands unattended monitor is situated 600m west of the attended noise monitoring location R23, therefore, background (LA90) noise levels are significantly lower due to offset distance to highway traffic.

A comparison of mine noise contributions between attended and unattended noise monitoring demonstrates a general consistency between attended and unattended results. It was noted that wind and highway traffic noise influenced measured noise levels for this assessment period with mine noise remaining below criteria throughout the June 2017 assessment period. Furthermore, for June 2017, results remained below the relevant criteria for both attended and unattended locations.

Table 8 provides a summary comparison of results between the attended and unattended noise surveys for R23.

Table 8 Comparison of Attended and Unattended Results – R23

Assessment Type	Time (hrs)	Descriptor (dBA re 20 µPa)			Criteria	Mine Noise Contribution	Meteorology ¹	Description and SPL, dBA
		L _{Amax}	L _{Aeq}	L _{A90}				
Tuesday 6 June 2017								
Attended	21:31	62	51	47	39	38	Dir: S 0.2 m/s Highway traffic 45-50 Mine hum 32-36	
Unattended	21:30	55	47	43	39	39	Stab Class: E Highway traffic Mine hum	
Attended	22:32	58	46	43	39	32	Dir: S 0.2 m/s Highway traffic 34-51 Mine hum <34	
Unattended	22:30	56	45	41	39	TGO Inaudible	Stab Class: E Highway traffic Dog	
Wednesday 7 June 2017								
Attended	21:17	57	48	43	39	39	Dir: S 0.5 m/s Highway traffic 45-52 Mine hum 38-40	
Unattended	21:00	58	47	43	39	TGO Inaudible	Stab Class: D Highway traffic	
Attended	22:24	58	50	47	39	35	Dir: S 4 m/s Highway traffic 45-60 Mine hum 35-42 Idle truck 50-52	
Unattended	22:00	53	43	38	39	TGO Inaudible	Stab Class: D Wind Highway traffic	
Thursday 8 June 2017								
Attended	20:44	59	48	43	39	34	Dir: S 1 m/s Highway traffic 36-50 Mine hum 32-36 Wind in trees 34-40	
Unattended	20:30	49	43	40	39	TGO Inaudible	Stab Class: E Wind Highway traffic	
Attended	22:25	54	46	42	39	37	Dir: S 2 m/s Idle truck 40-41 Mine hum 32-42 Highway traffic 36-51 Birds 38-46 Wind in trees <23	
Unattended	22:00	59	41	35	39	TGO Inaudible	Stab Class: D Wind Highway traffic	

Note 1: Meteorological data obtained from TGO's on-site weather station.

7 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment on behalf of Tomingley Gold Operations (TGO). The assessment was completed to provide monthly monitoring data so that TGO can actively quantify and manage site noise emissions.

Attended monitoring for three consecutive dates, from 6 June 2017 to 8 June 2017, has identified that TGO was audible on several occasions although did not exceed relevant limits on any occasion during the June 2017 assessment period.

This page has been intentionally left blank

Appendix A - Glossary of Terms

Several technical terms have been used in this report and are explained in **Table A1**.


Table A1 Glossary of Terms	
Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the INP as a single figure background level for each assessment period (day, evening and night). It is the tenth percentile of the measured L90 statistical noise levels.
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the most common being the 'A-weighted' scale. This attempts to closely approximate the frequency response of the human ear.
dB(Z)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a source, and is the equivalent continuous sound pressure level over a given period.
LAmx	The maximum root mean squared (rms) sound pressure level received at the microphone during a measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing each assessment period over the whole monitoring period. The RBL is used to determine the intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (SWL)	This is a measure of the total power radiated by a source. The sound power of a source is a fundamental location of the source and is independent of the surrounding environment. Or a measure of the energy emitted from a source as sound and is given by : $= 10 \cdot \log_{10} (W/W_0)$ Where : W is the sound power in watts and W ₀ is the sound reference power at 10-12 watts.

Table A2 provides a list of common noise sources and their typical sound level.

Table A2 Common Noise Sources and Their Typical Sound Pressure Levels (SPL), dBA

Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

Figure A1 – Human Perception of Sound

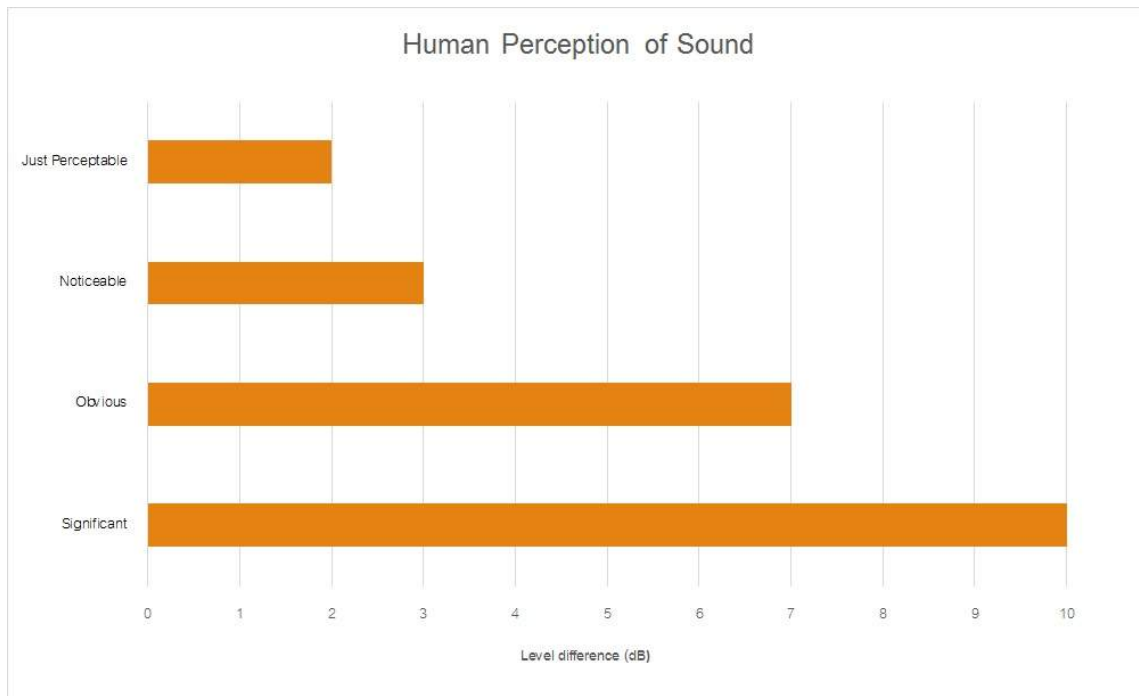

Muller Acoustic Consulting Pty Ltd
PO Box 262, Newcastle NSW 2300
ABN: 36 602 225 132
P: +61 2 4920 1833
www.mulleracoustic.com

